

LAMINATE

COUNTRY COLLECTION



Discover the elegance of luxury laminates with the authentic look and feel of real timber, in a wide plank featuring wrapped pressed bevel edges, enhanced EIR textures and rustic charm — a timeless style that will last for years to come. Choose from an extensive selection of on-trend colours and patterns.

8mm(T) X 192mm(W) X 1261mm(L)

Country - Galena Oak



Starts Beautiful. Stays Beautiful.

Pressed Bevel



GALENA OAK
TL-37531-PEFC

BRANSON OAK*
TL-37529-PEFC

SEDONA OAK*
TL-37525-PEFC

ASHEVILLE OAK
TL-37528-PEFC

AUSTIN OAK*
TL-37527-PEFC

ANNAPOLIS OAK
TL-37530-PEFC

STOWE OAK*
TL-37532-PEFC

CHARLOTTE OAK
TL-37526-PEFC


JACKSON OAK
TL-37533-PEFC

TORLYS
smart floors

*High Shade Variation

torlys.co.nz

122024

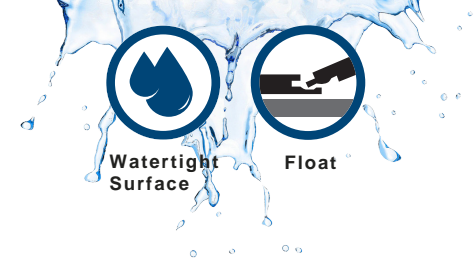

COUNTRY COLLECTION

The Country collection offers a seamless, cohesive look throughout your home, backed by the confidence of a 15-year watertight surface warranty for lasting beauty and durability.

PRODUCT DETAILS

DIMENSIONS	8mm(T) x 192mm(W) x 1261mm(L)
WEAR RESISTANCE	AC4
CARTON/ PALLET	2.178 m ² per box 52 cartons per pallet
LOCKING SYSTEM	UNICLIC®
FINISH	TORLYS Maxx Commercial Finish
TEXTURE	EIR (Embossed in Register)
EDGES	4-Sided Pressed Bevel Edge
INSTALLATION	Above, On & Below Grade Radiant Heat Safe

WARRANTY

Lifetime Residential S.M.A.R.T. Warranty
15-year Watertight Surface Warranty*

15-Year Commercial Limited Warranty
RECOMMENDED UNDERLAY

TORLYS Safe and Sound offers antimicrobial technology to protect your floors from the growth of mould and mildew



FINISHING TOUCHES



Visit torlys.co.nz/accessories for more details and current accessory offerings

PRODUCT HIGHLIGHTS

- **INNOVATIVE DESIGN:** Uniclic® is the industry leading, gap-resistant joint system
- **LONGEVITY:** Durable, stable, dent-resistant floors with TORLYS Enhanced Smart Core
- **PEACE OF MIND:** Watertight Surface with AquaProtect, keeping water from penetrating the core.
- **SEAMLESS LOOK:** Install up to 15m x 15m with no transitions
- **ENDURING BEAUTY:** Plank repairs are quick and easy with TORLYS Bulldog™
- **ELEVATED VISUALS:** Embossed-in-Register textures with pressed bevels that extend the decor layer and texture for a real wood look
- **MADE FOR LIFE:** Built-in antimicrobial protection for cleaner spaces

TORLYS BEAUTIFUL PROMISE

Love the style, colour & quality of your floors for years to come.

SUSTAINABILITY

Every TORLYS Smart Floor has two lives. Years down the road when you want to change your floor, with the uniclic joint, you can uplift your floor and install it in another room


*Visit torlys.co.nz for details

SUSTAINABILITY & INDOOR AIR QUALITY



HOW IT'S MADE

- 1) TORLYS MAXX COMMERCIAL FINISH**
Antimicrobial | Anti-Wear
- 2) DECORATIVE LAYER**
Real wood-like patterns featuring natural designs
- 3) TORLYS SMART CORE**
Dent resistant and strong
- 4) TORLYS UNICLIC® JOINT**
Gap-free installations and easy repairs with TORLYS Bulldog™ Easy Plank Replacer
- 5) BOTTOM LAYER**
Provides moisture protection to the core and added stability

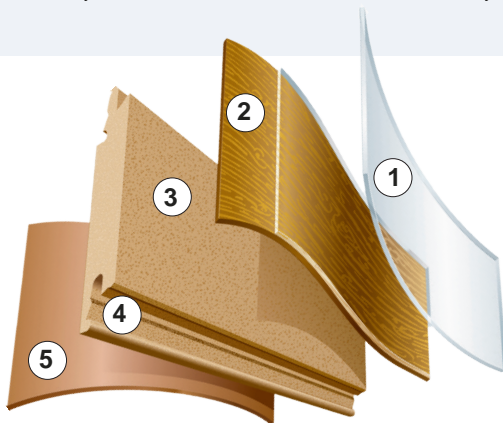

EN - ISO Product Performance Test Grid – Country Collection LAMINATE

DETAILS	VALUES	REFERENCE STANDARD	TORLYS RESULT
Product Dimensions	8mm (T) x 192mm (W) x 1261mm (L)		
Joint Type	Uniclic - four sides with Aqua Protect		
Packaging	9 planks / box and 2.178 m ² / box		
Bevel Type	4V-Pressed Bevel		
C-o-C Certification	PEFC		
Usage Class	21-22-23 / 31-32	EN13329	21-22-23 / 31-32
Wear Resistance	≥4000 cycles	EN13329	≥4000 cycles
Wear Class	AC4	EN13329	AC4
Dimensional Stability <small>Variations after changes in RH</small>	Average ≤ 0.9mm Δl & Δw	EN13329	Δl & Δw Average ≤ 0.9mm <small>Variations after changes in RH</small>
Impact Resistance Small Ball	≥ 35mm	EN17368d	≥ 35mm
Impact Resistance Large Ball	≥ 750mm	EN13329	≥ 750mm
Scratch Resistance	Charge ≥ 3N	EN438-2,25	Charge ≥ 3N
Effect of a Castor Chair	25,000 cycles	ISO 4918 (with underlay)	No change
Topical Moisture Resistance NZBC E3.3.3 & E3.3.6	NZWTA NZ Wool Testing Authority	ISO4760:2022(E) Impervious Joint	Passed NZ Independent Test
Thickness swelling	≤ 18% after 24hr immersion in water at 20°C	ISO24336	≤ 18%
General Appearance	Height differences Opening between joints Cupping in length Cupping in width	EN13329	≤ 0.15mm ≤ 0.20mm ≤ 0.50% concave / ≤ 1.00% convex ≤ 0.15% concave / ≤ 0.20% convex
Locking Strength	Fmax long side: ≥ 1 kN/m Fmax short side: ≥ 2 kN/m	ISO24334	Fmax long side: ≥ 1 kN/m Fmax short side: ≥ 2 kN/m
Effect of a Furniture Leg	No visible damage when tested with simulated movement of furniture leg	EN424	No visible damage
Resistance to Staining	Group 1,2: Class 5 Group 3: Class 4	EN 438	Class 5 Class 4
Light Fastness	Grey reference: Class 4	EN ISO 4892 2.2006/A1:2009 Procedure B – Cycle 5	Class 4
Formaldehyde Emission	E1 <0,01 ppm	EN 717-1	<0,01 ppm
Anti-static	≤ 2,0 kW	EN 1815	≤ 2,0 kW
Reaction to Fire	Class Cfl-s1	EN 13501-1	Class Cfl-s1
Thermal Resistance	0,055 m ² K/W	EN 12996:2001	0,055 m ² K/W
Slip Resistance	DS: μ ≥ 0,30	EN 13893	DS: μ ≥ 0,30
Burning Cigarette	Class 5	EN 438-2.30	Class 5 no visible damage
Underfloor Heating	Suitable for all NZ Building Code approved underfloor heating		
Sound Insulation	Pair with Torlys Acoustic Underlay , for superior installation and to achieve a high level of *impact sound reduction or *noise transfer result.		
Warranty	Residential Lifetime Limited Non-prorata Transferable Warranty *15-year watertight surface warranty – <i>see installation requirements</i> 15 Year Limited Commercial		

Further information is available on our **website**: www.torlys.co.nz

- Architectural Specifications
- Installation Instructions
- Product Brochure

